

# Geolift TX5000




## Full-height alignment scissor lift

Space-saving surface or recessed-mounted wheel alignment lift.



### KEY FEATURES

- Homologated and certified in accordance with European Directive EN1493:2010
- Suitable for in-ground (recessed) or on-ground (surface mounted) installation
- Mechanical locks with automatic engagement and release
- Turntable recess covers included as standard
- Optional integrated jacking beam available
- Long rear slip plates
- Pressure overload valve equipped in power unit
- 24V safety control
- Manual emergency lowering in the event of power loss

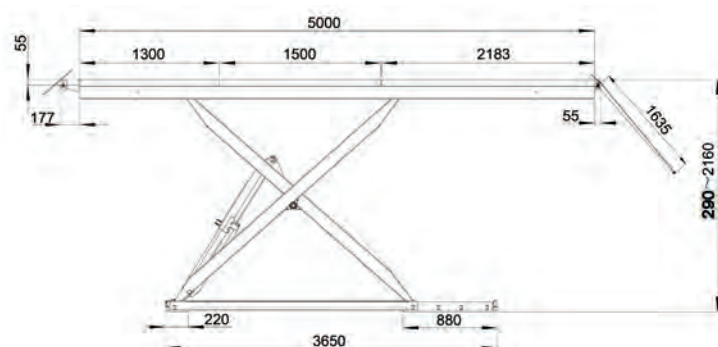

### TECHNICAL DATA

- Lift capacity: 5000kg
- Max. lifting height: 2160mm
- Min. lowered height (Surface mounted): 290mm
- Platform length: 5000mm
- Lifting/lowering time: 60 seconds
- Electric power: 400V 3ph/230V 1ph

