


LUXUS DX35

FULL HEIGHT SCISSOR LIFT


The low profile LUXUS DX35 full-height scissor lift continues the LUXUS focus on class-leading vehicle lifts designed for those customers where, quite simply, only the best will do.

Suitable for either in-ground or surface-mounted installation, the DX35 is homologated and certified to European Directive EN1493:2010 and boasts a range of luxury features. The concept behind all LUXUS products is to create a product focused on build quality first and foremost. Thickness of steel, quality of welds, and sourcing of premium quality key components from only the most reliable sources are the basic criteria for LUXUS. This focus on quality is backed by a comprehensive 3 year warranty, which includes an inspection and service from a factory trained engineer in the second and third years of ownership.

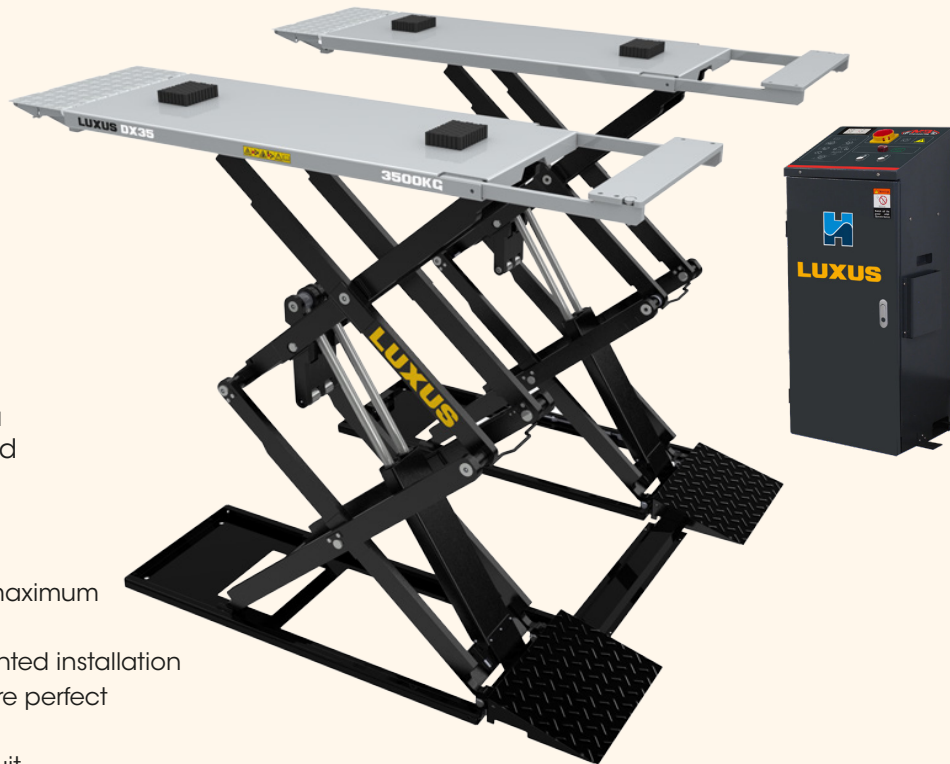

KEY FEATURES

- Extendable drive-on, drive-off platforms for maximum vehicle flexibility
- Suitable for either in-ground or surface-mounted installation
- Double master/slave hydraulic circuits assure perfect synchronization.
- Solenoid safety valve in each hydraulic circuit
- Automatic levelling by simply pushing a bleeding button
- Equipped with pressure overload valve in power unit
- 24V safety control
- Alarm during final lowering phase
- Manual emergency lowering
- Proximity sensor detects obstacles under the lift, maintaining vehicle stability
- Foot protection function activates during decent below 240mm lift height

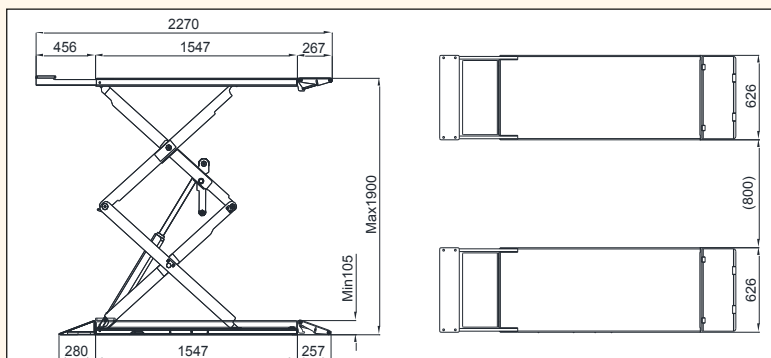

SPECIFICATIONS

Lifting capacity:	3500kg
Max. lifting height:	1900mm
Min. height:	105mm
Platform length:	1547mm - 2270mm
Platform width:	626mm
Recommended distance between platforms:	800-1000mm
Lifting lowering time:	60 seconds
Electric power:	230V, 1Ph/400V, 3Ph
Motor power:	2.2KW/2.6KW
Weight:	1100kg
Working temp:	-10°C to 40°C