


GEO LIFT 4200



FOUR POST LIFT

The Staple 4 Post Alignment Lift from Hofmann Megaplan.

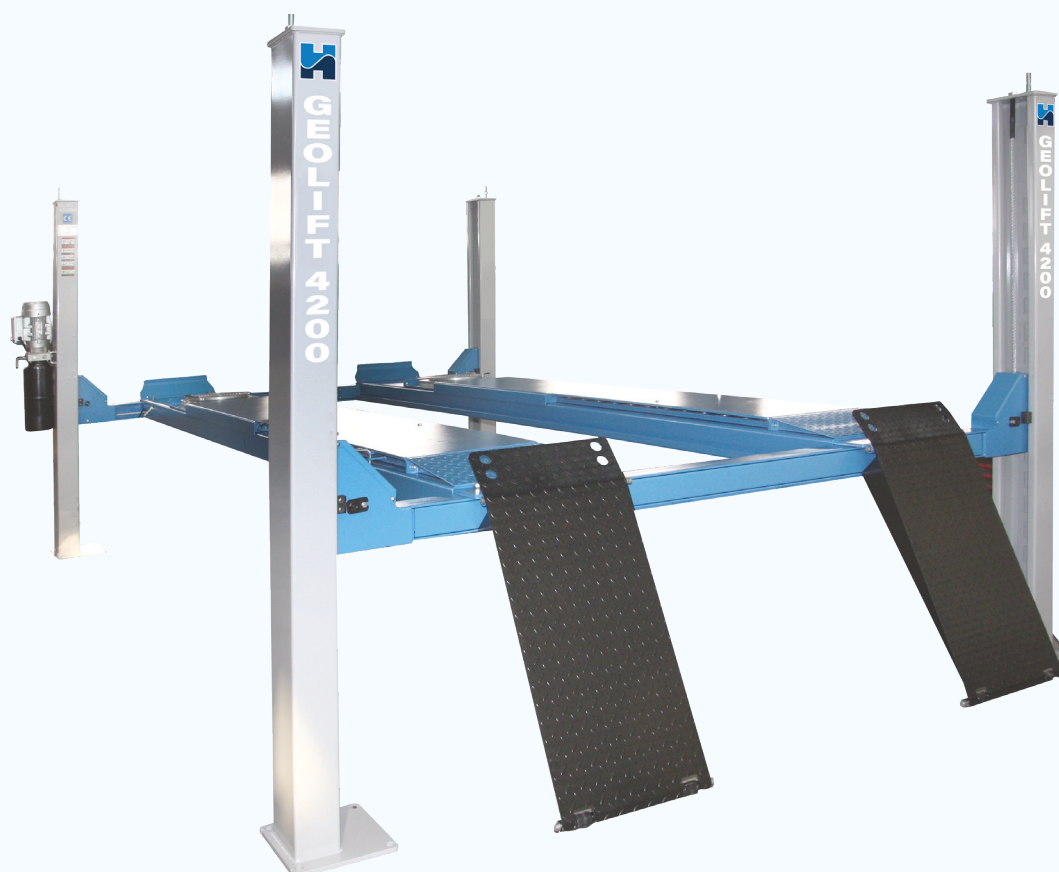

KEY FEATURES

- Electro-hydraulic operation with synchronization cables means the platforms stay perfectly level with each other
- Air locking release offers instantaneous control and failsafe reliability
- Front wheel stops can easily be replaced by optional drive-off ramps
- Bolt-on alignment kit included as standard for alignment type
- Available in 1 or 3 Phase
- Homologated and certified product according to the European Directive EN1493:2010

SPECIFICATIONS

Lifting Capacity:	4,200kg	Overall Length:	5,038mm
Max. Raised Height - Standard Type:	1,800mm	Overall Height:	2,263mm
Max. Raised Height - Alignment Type:	1,800mm	Overall Width:	3,154mm
Min. Lowered Height - Standard Type:	130mm	Raised Time:	60 seconds
Min. Lowered Height - Standard Type:	180mm	Pneumatic Locks:	Yes
Runway Length:	4,808mm	Rated Pneumatic Pressure:	6 bar - 8 bar
Runway width:	512mm	Working Temperature:	-10°C to 40°C
Free Width Between Runways:	912mm	Average Weight of Package Standard:	1,250kg
Width Between Two Columns:	2,850mm	Average Weight of Package Alignment:	1,870kg

