

MEGAMOUNT 70LLF





TYRE CHANGER

The megamount 70LLF is manufactured 100% in Italy and is based on traditional tyre changer designs, which have been brought up to date to work with modern rims and tyres.

The chassis and column are manufactured with an emphasis on longevity and the heavy duty construction delivers a level of rigidity, which eliminates the 'flex' that can develop over time, on lighter machines. This tyre changer includes a host of standard features that would often be considered 'extras', including an intelligently designed, progressive turntable speed function (from 0 to 16 rpm), removeable pedal box, and super-duty fully-automatic operation.

KEY FEATURES

- **HPX Advance 'assist' system** – Two pneumatic cylinders result in an assist arm that can also be used to break the bead (traditionally a single cylinder is employed on tyre changer assist arms).
- **Separate travelling press device** – Provides even more control and power for the operator when changing difficult tyres to expensive rims.
- **Infinitely variable turntable speed control up to 16 rpm** – Variable speed is controlled by pressing a pedal as you would an accelerator pedal in a car.
- Integral wheel lifter.
- Leverless operation.
- 26" clamping.

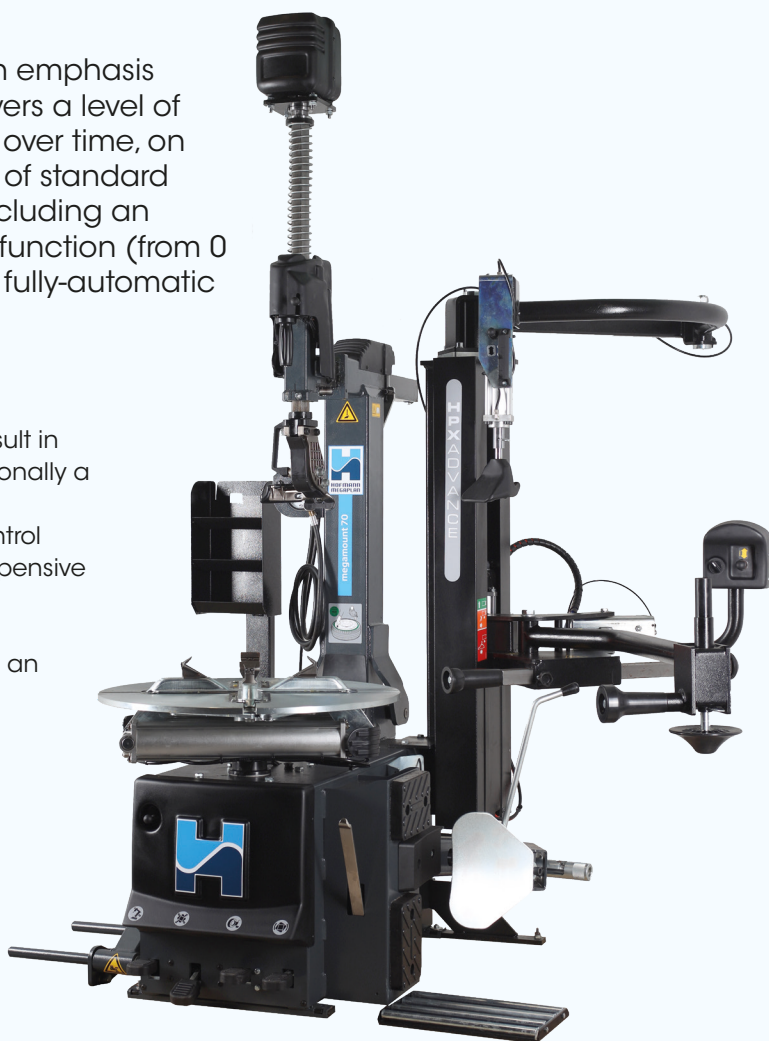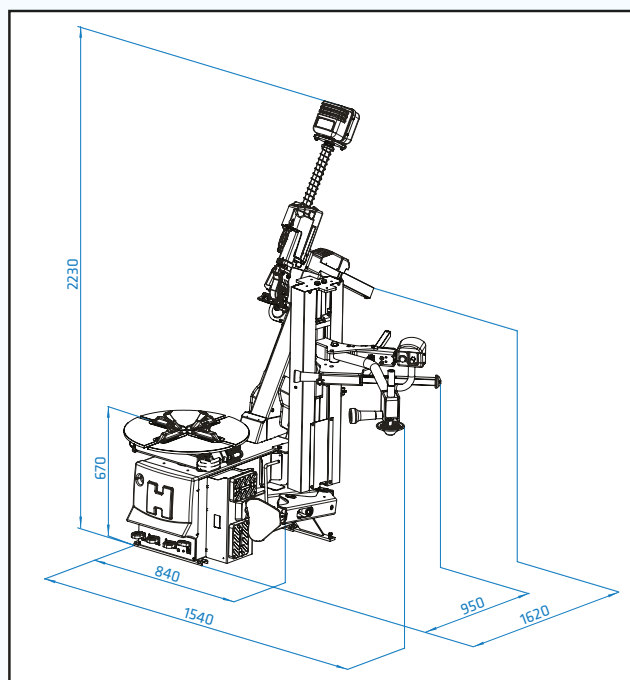

SPECIFICATIONS

Clamping capacity	12" min – 26" max
Max wheel diameter	1,170 mm (46")
Max wheel width	400 mm (16")
Bead breaker force	15,000 N
1-Phase motor	1.5 kW (Inverter) 230V 50–60Hz
Turntable speed	0–16 rpm (1ph – Inverter)
Operating pressure	8–10 bar (116–145 psi)
Noise level	< 70 ± 3 dB (A)
Net weight	285 kg